

Certificate Declaration

Dear Sir, Madam

Date: 17 Dec 2021

About AG Neovo QX-24/ QX-28/ QX-32

EAN Code/UPC Code: 4710739593945/190695000543

4710739593990/190695000598


4710739593952/190695000550

The QX-Series multi-screen capable 4K/UHD surveillance & security display is designed for demanding video surveillance and digital signage applications. Multi-screen viewing enables simultaneous display of multiple signals with up to 4 split screens. In addition to simplifying hardware setup by enabling the use of one display in place of four 1080p monitors, the QX-Series 4K/UHD security & surveillance display provides the gain in clarity required for real-time and up-close monitoring in traffic management centres, casinos, emergency operations centres and other public installations.

A handwritten signature in blue ink, consisting of a stylized, cursive 'M' followed by a long horizontal stroke.



Experience the 4K Difference

Don't miss a single detail with this powerful 4K/UHD display. View smooth 4K/UHD video and graphics with a new level of detail and clarity. Offering 8.3 million pixels, the QX-Series 4K/UHD surveillance & security display provides sufficient resolution for even the most demanding video surveillance and digital signage applications.

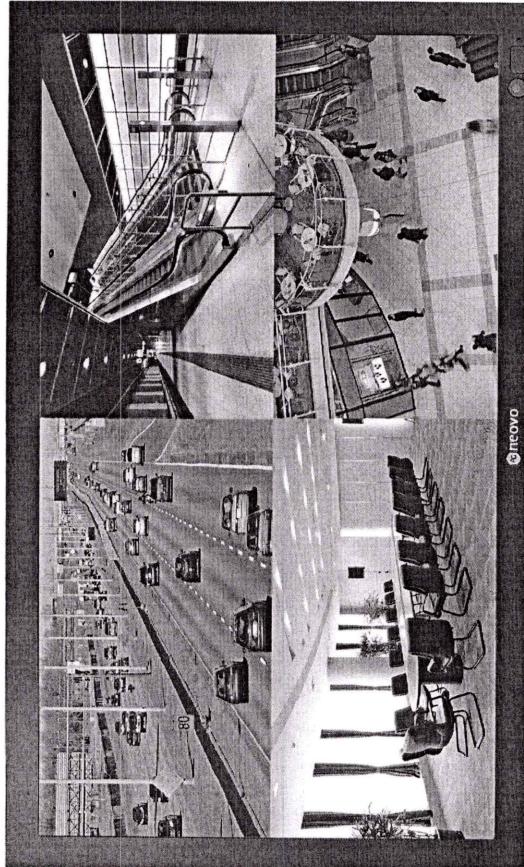

Multi-screen Viewer; One display, Four screens



Beyond traditional two-input Picture-by-Picture (PIP) feature, the QX-Series' multi-screen viewer can display up to four full HD screens simultaneously from four different input sources. This advanced feature allows it to replace a typical four monitor setup and delivers four-quadrant viewing at crisp and true Full HD content.

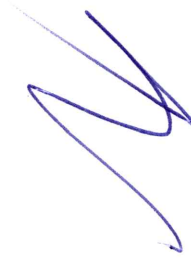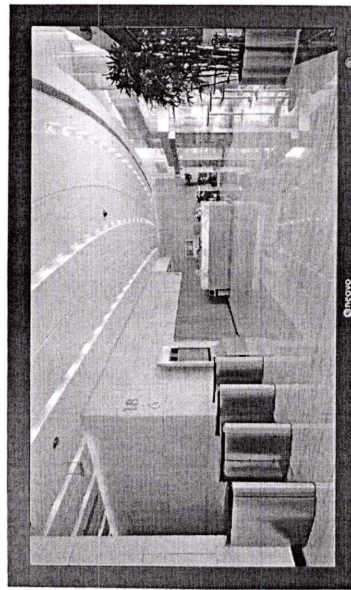

Industry-leading Reliability

Designed for 24/7 operation, these durable metal-housed 4K/UHD security & surveillance display protected with NeoV™ Optical Glass take advantage of superior components to ensure a long product lifetime. Its integrated HeatControl Sensors* automatically activate the internal cooling fans, which is crucial when the temperature rises in mission-critical installations.

*Features may vary by model.

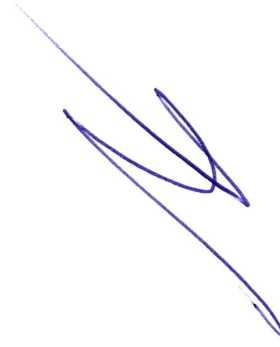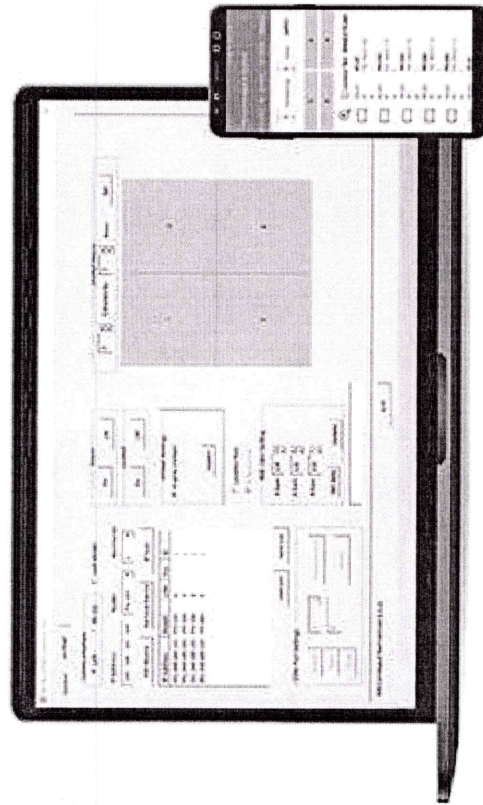


PID Command & Ctrl Software

PID Command & Ctrl is a software that allows users to control AG Neovo displays via LAN or RS232 connections. It provides a simple and intuitive interface for remote management, OSD-related settings, and easy control of deployed displays. The native UniWall™ feature allows AG Neovo displays to create up to 5x5 video walls without third-party equipment within minutes and assist system integrators with setting up displays.


Features

QX-24

Panel	Panel Type:	LED-Backlit TFT LCD (VA Technology)
	Panel Size:	23.8"
	Max. Resolution:	UHD 3840 x 2160
	Pixel Pitch:	0.137 mm
	Brightness:	300 cd/m²
	Contrast Ratio:	20,000,000:1 (DCR)
	Viewing Angle (H/V):	178°/178°
	Display Colour:	1.07B
	Response Time:	5 ms
	Surface Treatment:	Anti-Glare Treatment (Haze 25%), 3H Hard Coating
Frequency	Frequency (H):	31 kHz-92 kHz

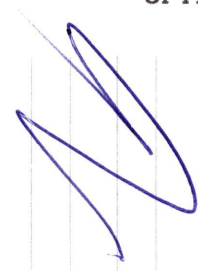


Signal Input	Frequency (V): DisplayPort: HDMI: DVI: VGA:	48 Hz-85 Hz 1.2 x 1 2.0 x 1 24-Pin DVI-D 15-Pin D-Sub x 1
External Control	RS232 In: LAN:	9-Pin D-Sub RJ45 x 1
Other Connectivity	USB:	2.0 x 1 (Service Port)
Audio	Audio In: Internal Speakers:	Stereo Audio Jack (3.5 mm) 3W x 2
Power	Power Requirements: On Mode: Standby Mode: Off Mode:	DC 12V, 4.3A 27W (On) < 0.5W < 0.3W
Glass	Thickness: Reflection Rate: Transmission Rate: Hardness:	3.0 mm (0.12") < 1% > 97% > 9H
Operating Conditions	Temperature:	0°C-40°C (32°F-104°F)
Mounting	Humidity: VESA FPM/PMI:	10%-90% (non-condensing) Yes (100 x 100 mm & 100 x 200 mm)
Stand	Tilt: Pivot: Swivel: Height Adjustment:	0° to 27° ° to 90° ± 45° 100 mm
Security	Kensington Security Slot:	Yes
Dimensions	Product with Base (W x H x D):	572.6 x 514.0 x 270.0 mm (22.5" x 20.2" x 10.6")

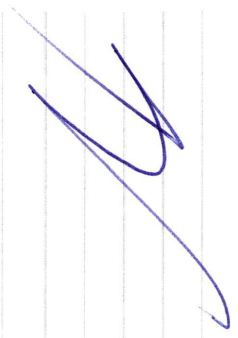


	Product w/o Base (W x H x D):	572.6 x 350.0 x 56.0 mm (22.5" x 13.8" x 2.2")
	Packaging (W x H x D):	720.0 x 481.0 x 250.0 mm (28.4" x 18.9" x 9.8")
Weight	Product w/o Base:	7.3 kg (16.1 lb)
	Product with Base:	10.1 kg (22.3 lb)
	Packaging:	13.1 kg (28.9 lb)
Regulation Approval	Certifications & Compliance:	CB, CE, FCC, WEEE, RoHS, REACH, EAC
Accessories	Supplied:	Power Adaptor, Power Cord, HDMI Cable, Remote Control, Batteries, Quick Start Guide, Warranty Card
Optional Accessories	Ceiling Mount (Landscape only):	<u>CMP-01+WMK-03</u>
	Wall Mount (Landscape only):	<u>WMA-01, WMK-01, WMK-03, PMK-01</u>
	Desk mount (Landscape only):	<u>DMC-01, DMC-02D, DMS-01D, DMS-01Q</u>
Power	Power Supply:	External
Storage Conditions	Temperature:	-20°C-60°C (-4°F-140°F)
	Humidity:	5%-95% (non-condensing)

QX-28


Panel	Panel Type:	LED-Backlit TFT LCD (TN Technology)
	Panel Size:	27.9"
	Max. Resolution:	UHD 3840 x 2160
	Pixel Pitch:	0.160 mm
	Brightness:	300 cd/m ²
	Contrast Ratio:	20,000,000:1 (DCR)
	Viewing Angle (H/V):	170°/160°
	Display Colour:	1.07B

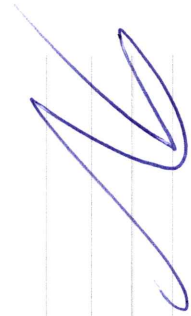

Response Time:	3 ms
Surface Treatment:	Anti-Glare Treatment (Haze 25%), 3H Hard Coating
Frequency	
Frequency (H):	31 kHz-92 kHz
Frequency (V):	48 Hz-85 Hz
Signal Input	
DisplayPort:	1.2 x 1
HDMI:	2.0 x 1
DVI:	24-Pin DVI-D
VGA:	15-Pin D-Sub x 1
External Control	
RS232 In:	9-Pin D-Sub
LAN:	RJ45 x 1
Other Connectivity	
USB:	2.0 x 1 (Service Port)
Audio	
Audio In:	Stereo Audio Jack (3.5 mm)
Internal Speakers:	3W x 2
Power	
Power Requirements:	DC 12V, 3.4A
On Mode:	29W (On)
Standby Mode:	< 0.5W
Off Mode:	< 0.3W
Glass	
Thickness:	3.0 mm (0.12")
Reflection Rate:	< 1%
Transmission Rate:	> 97%
Hardness:	> 9H
Operating Conditions	
Temperature:	0°C-40°C (32°F-104°F)
Humidity:	10%-90% (non-condensing)
Mounting Stand	
VESA FPMPI:	Yes (100 x 100 mm & 100 x 200 mm)
Tilt:	0° to 22°
Pivot:	° to 90°
Swivel:	± 45°




Security	Height Adjustment:	100 mm
	Kensington Security Slot:	Yes
Dimensions	Product with Base (W x H x D):	681.0 x 565.5 x 270.0 mm (26.8" x 22.3" x 10.6")
	Product w/o Base (W x H x D):	681.0 x 405.0 x 59.8 mm (26.8" x 15.9" x 2.4")
	Packaging (W x H x D):	778.0 x 538.0 x 250.0 mm (30.6" x 21.2" x 9.8")
Weight	Product w/o Base:	10.4 kg (22.9 lb)
	Product with Base:	13.3 kg (29.3 lb)
	Packaging:	16.5 kg (36.4 lb)
Regulation Approval	Certifications & Compliance:	CE, LVD, WEEE, RoHS, REACH, EAC
Accessories	Supplied:	Power Adaptor, Power Cord, HDMI Cable, Remote Control, Batteries, Quick Start Guide, Warranty Card
Optional Accessories	Ceiling Mount (Landscape only):	<u>CMP-01+WMK-03</u>
	Wall Mount (Landscape only):	<u>WMA-01, WMK-01, WMK-03, PMK-01</u>
Power	Power Supply:	External
Storage Conditions	Temperature:	-20°C-60°C (-4°F-140°F)
	Humidity:	5%-95% (non-condensing)

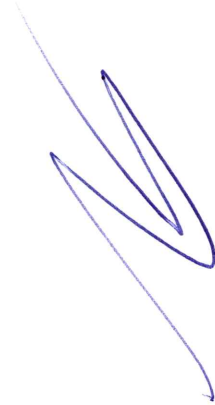


QX-32

Panel	Panel Type:	LED-Backlit TFT LCD (VA Technology)
	Panel Size:	32.0"
	Max. Resolution:	UHD 3840 x 2160
	Pixel Pitch:	0.185 mm
	Brightness:	350 cd/m ²
	Contrast Ratio:	20,000,000:1 (DCR)
	Viewing Angle (H/V):	178°/178°
	Display Colour:	1.07B
	Response Time:	5 ms
	Surface Treatment:	Anti-Glare Treatment (Haze 25%),3H Hard Coating
Frequency	Frequency (H):	31 kHz-92 kHz
	Frequency (V):	48 Hz-85 Hz
Signal Input	DisplayPort:	1.2 x 1
	HDMI:	2.0 x 1

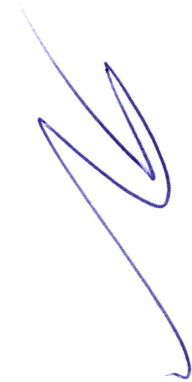




DVI:	24-Pin DVI-D
VGA:	15-Pin D-Sub x 1
External Control	RS232 In: 9-Pin D-Sub
LAN:	RJ45 x 1
Other Connectivity	USB: 2.0 x 1 (Service Port)
Audio	Audio In: Stereo Audio Jack (3.5 mm)
Internal Speakers:	10W x 2
Power	Power Requirements: AC 100-240V, 50/60 Hz
On Mode:	50.1W (On)
Standby Mode:	< 0.5W
Off Mode:	< 0.3W
Glass	Thickness: 3.0 mm (0.12")
Reflection Rate:	< 1%
Transmission Rate:	> 97%
Hardness:	> 9H
Operating Conditions	Temperature: 0°C-40°C (32°F-104°F)
Humidity:	10%-90% (non-condensing)
Mounting	VESA FPM/PMI: Yes (200 x 200 mm & 400 x 200 mm)
Dimensions	Product w/o Base (W x H x D): 771.0 x 461.0 x 77.0 mm (30.4" x 18.1" x 2.8")




Packaging (W x H x D):	860.0 x 555.0 x 150.0 mm (33.9" x 21.9" x 5.9")
Weight	15.7 kg (34.6 lb)
Product w/o Base:	19.0 kg (41.9 lb)
Packaging:	
Regulation Approval Certifications & Compliance:	CE, LVD, FCC, RoHS WEEE, REACH, EAC
Accessories	Power Cord, HDMI Cable, Remote Control, Batteries, Quick Start Guide
Optional Accessories Stand:	<u>STD-02A</u>
Ceiling Mount (Landscape only):	<u>CMP-01+LMK-02</u> , <u>CMP-01+WMK-03</u>
Wall Mount (Landscape only):	<u>WMA-01</u> , <u>LMA-01</u> , <u>LMK-02</u> , <u>WMK-03</u> , <u>LMA-02</u>
Floor Mount (Landscape only):	<u>FMS-01</u> , <u>FMS-02</u> , <u>FMC-02</u>
Power	Power Supply: Internal
Storage Conditions	Temperature: -20°C-60°C (-4°F-140°F)
	Humidity: 5%-95% (non-condensing)

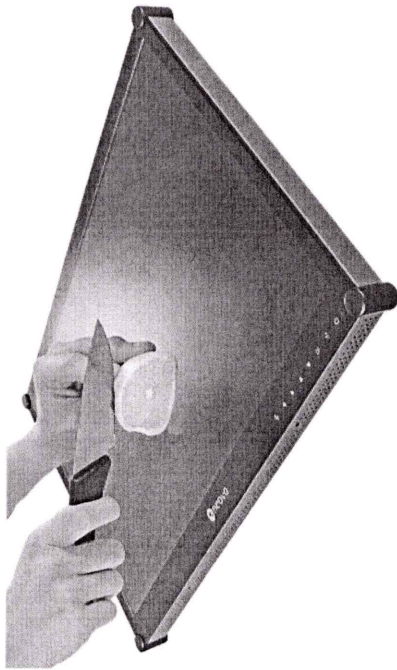



NeoV Glass Screen attains a measurement of 6 on the MOH's hardness scale.

NeoV glass screen is designed to provide a computer monitor supreme image performance, LCD panel protection, and easy maintenance. To complete one NeoV™ optical hard glass takes 5 rigorous procedures, each step requires glass inspection to examine any bubbles, stone scratches, or any other flaws that could potentially reduce or damage the quality. Since receiving a "Best Innovation" award from PC Magazine, NeoV™ glass computer monitors have become the industry's most trusted screens for panel protection.



Maintenance Made Easy

NeoV™ glass monitor screen has passed the CNS (13033) A-level abrasion acid test and B-level alkali test. This great monitor with a glass screen can be easily cleaned and disinfected with water, alcohol, and other common cleaning solutions.

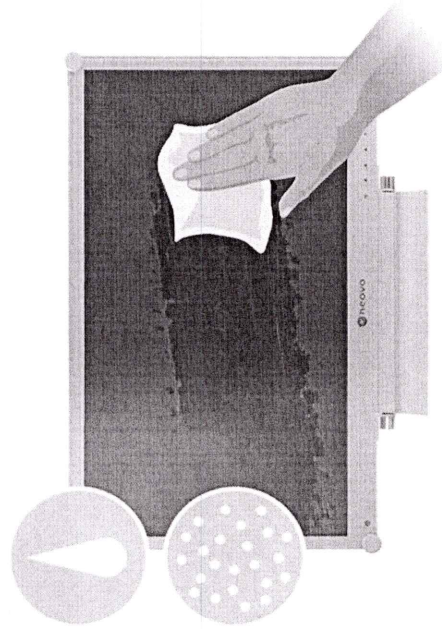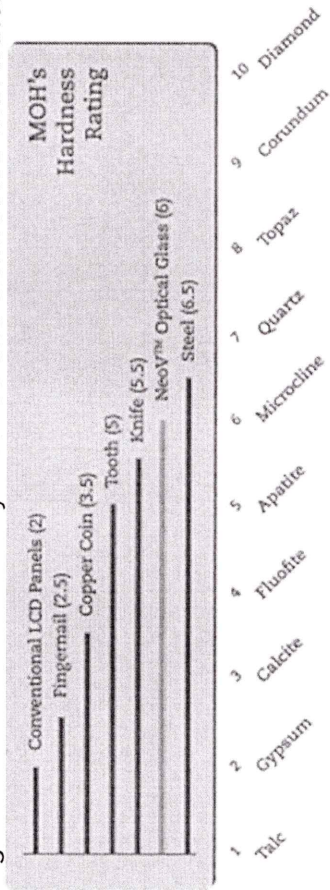

Compliance with the IEC / EN 60601-1 standard power supply ensures the safety of your staff and patients in the clinical settings, preventing an electric shock, energy-related hazards, fire, and heat-related hazards.

CONFIDENTIAL

specifications are subject to change without prior notice

AG Neovo Technology BV (Chamber of Commerce of Rotterdam Netherlands no: 24308102)

Jack Yu

CEO

Tel: +31 10 264 2651 Fax: +31 10 442 5742 Email: jack.yu@agneovo.com

Copyright © 2021, AG Neovo. All Rights Reserved.

AG Neovo Technology B.V.
Molenaar 9
Lissele
The Netherlands
Tel: +31 - 10 - 4425737
Fax: +31 - 10 - 4425742



AG Neovo Corporate | Healthcare | Solutions