

LA2203 22-INCH FHD MONITOR




FEATURES

- **FHD Monitor with IPS Technology:** Enjoy clear and consistent color reproduction from any angle.
- **High Contrast Ratio 20 million:1 (DCR):** Enhances depth and detail in every image.
- **Smooth 100Hz Refresh Rate:** Ensures fluid and clear visuals during intensive multitasking and multimedia tasks, delivering better viewing experience.
- **Versatile Connectivity:** Equipped with HDMI and VGA ports for easy device compatibility.
- **Built-in Audio:** Integrated speakers deliver clear sound without the need for external speakers.
- **VESA Mounting:** 100 x 100mm VESA support for flexible installation in any workspace.
- **Comfortable Viewing:** Flicker-free and blue light filter help reduce eye strain during extended use.

The LA2203 features a sleek, frameless design with a high-quality IPS panel, delivering vibrant colors and wide viewing angles for an immersive experience. With Full HD resolution, an impressive 20,000,000:1 Dynamic Contrast Ratio, and a 100Hz refresh rate, every scene appears sharper and smoother, reducing motion blur and enhancing clarity. The combination of HDMI and VGA connectivity and built-in speakers make it a versatile choice for work and entertainment.

TECHNICAL DRAWING

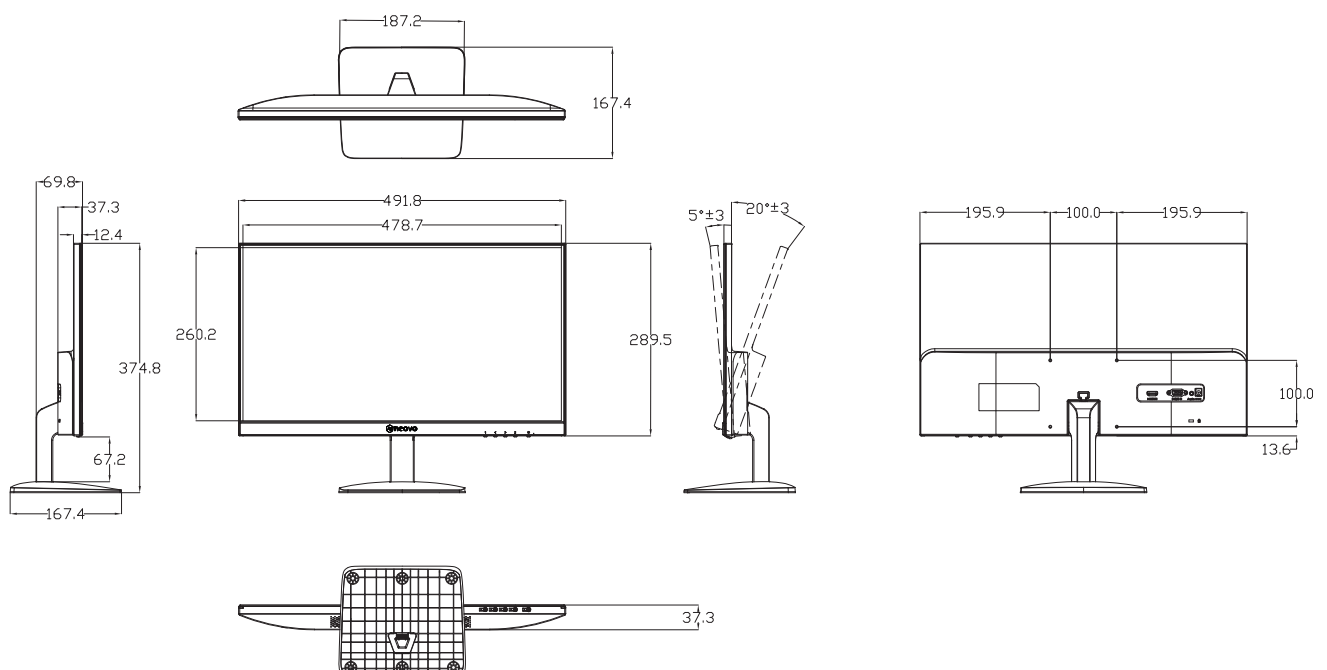

SPECIFICATIONS

| | |
|-------------------------------|--|
| Panel | |
| Panel Type | LED-Backlit TFT LCD (IPS Technology) |
| Panel Size | 21.5" |
| Max. Resolution | FHD 1920 x 1080 |
| Pixel Pitch | 0.241 mm |
| Brightness | 250 cd/m² |
| Contrast Ratio | 20,000,000:1 (DCR) |
| Viewing Angle (H/V) | 178°/178° |
| Display Colour | 16.7M |
| Response Time | 5 ms |
| Surface Treatment | Anti-Glare Treatment (Haze 25 %), 3H Hard Coating |
| Frequency | |
| Frequency (H) | 30 kHz-85 kHz |
| Frequency (V) | 50 Hz-75 Hz |
| Signal Input | |
| HDMI | 1.4 x 1 |
| VGA | 15-Pin D-Sub x 1 |
| Audio | |
| Audio In | Stereo Audio Jack (3.5 mm) |
| Internal Speakers | 2W x 2 |
| Power | |
| Power Supply | External |
| Power Requirements | DC 12V, 2.5A |
| On Mode | 15W |
| Standby Mode | < 0.5W |
| Off Mode | < 0.3W |
| Operating Conditions | |
| Temperature | 0°C-40°C (32°F-104°F) |
| Humidity | 10%-90% (non-condensing) |
| Storage Conditions | |
| Temperature | -20°C-60°C (-4°F-140°F) |
| Humidity | 5%-90% (non-condensing) |
| Mounting | |
| VESA FPMPI | Yes (100 x 100 mm) |
| Stand | |
| Tilt | -5° to 20° |
| Security | |
| Kensington Security Slot | Yes |
| Dimensions | |
| Bezel Width | 2.5 mm (Top/Left/Right) 21.4mm (Bottom) |
| Product with Base (W x H x D) | 491.8 x 374.8 x 167.4 mm (19.4" x 14.7" x 6.5") |
| Product w/o Base (W x H x D) | 491.8 x 289.5 x 37.3 mm (19.4" x 11.4" x 1.5") |
| Packaging (W x H x D) | 544.0 x 345.0 x 108.0 mm (21.4" x 13.6" x 4.3") |
| Weight | |
| Product with Base | 2.31 kg (5.1 lb) |
| Product w/o Base | 2.06 kg (4.5 lb) |
| Packaging | 3.51 kg (7.7 lb) |
| Regulation Approval | |
| Certifications & Compliance | CE, LVD, WEEE, RoHS, REACH, EAC, UKCA |
| Power Adaptor Certifications | CE, WEEE |
| Accessories | |
| Supplied | HDMI Cable, Power Adaptor, Quick Start Guide |
| Optional Accessories | |
| Wall Mount | PMK-01, WMK-01 (additional 90-degree adaptor required) |
| Desk mount | DMC-01, DMC-02D, DMS-01D, ES-02 |



All specifications are subject to change without prior notice.
Copyright © 2025 AG Neovo. All rights reserved.
The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: LA2230 Version 1.0, 20250609